


R300

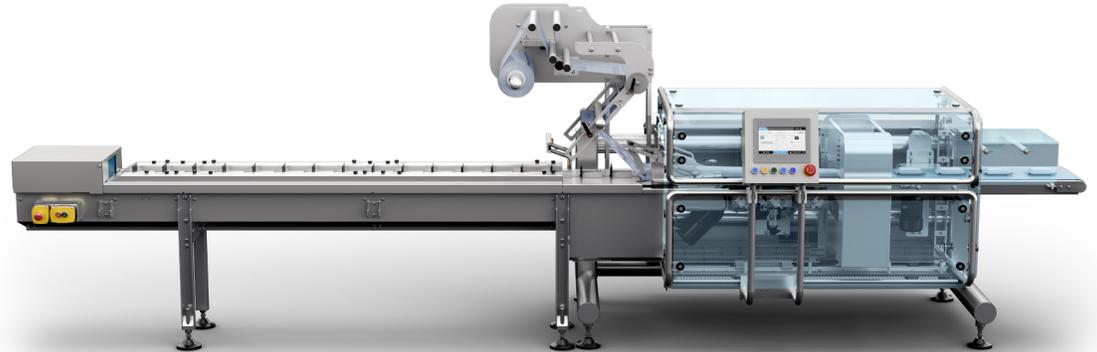

A robust hand-fed flow wrapper designed to maximize uptime and minimize cleaning time. Ideal for packaging cookies, brownies, morning goods, and other sticky, gooey, or crumbly baked goods.

EASY TO USE

- HMI-guided changeovers reduce changeover time and associated errors
- Simple, intuitive HMI layout with straightforward operating screens
- Driven film unwind avoids tedious setup and minimizes chance of error compared to traditional brake systems
- Package length, tightness control, and registration can easily be adjusted during production making new product setup quick and simple
- Automated jaw height adjustment reduces manual set up and ensures jaw is in a consistent and optimal location for each SKU change


EASY TO CLEAN

- Sloped pans under infeed allow debris to fall through for easy clean up
- Toolless infeed guards are easily removed, allowing open access for cleaning
- Integrated blower cleans debris from chain during cleaning mode
- Open-channel stainless steel infeed design makes wipe down and/or rinse fast and effortless
- Metal detectable lugs allow for x-ray detection, enabling food safety validation

EASY TO MAXIMIZE UPTIME

- Servo motor jaw drive detects and automatically clears product jams without stopping production
- Clear guards and open design allow visibility throughout the machine - including the Long Seam Unit (LSU)
- LED lights indicate machine status from a distance and increase visibility by illuminating the machine while guards are open
- Widely available Allen Bradley components ensure optimal parts availability and support compared to proprietary control platforms
- Modular frame and extendable infeed simplify upgrades as production needs change

HAYSSEN R300

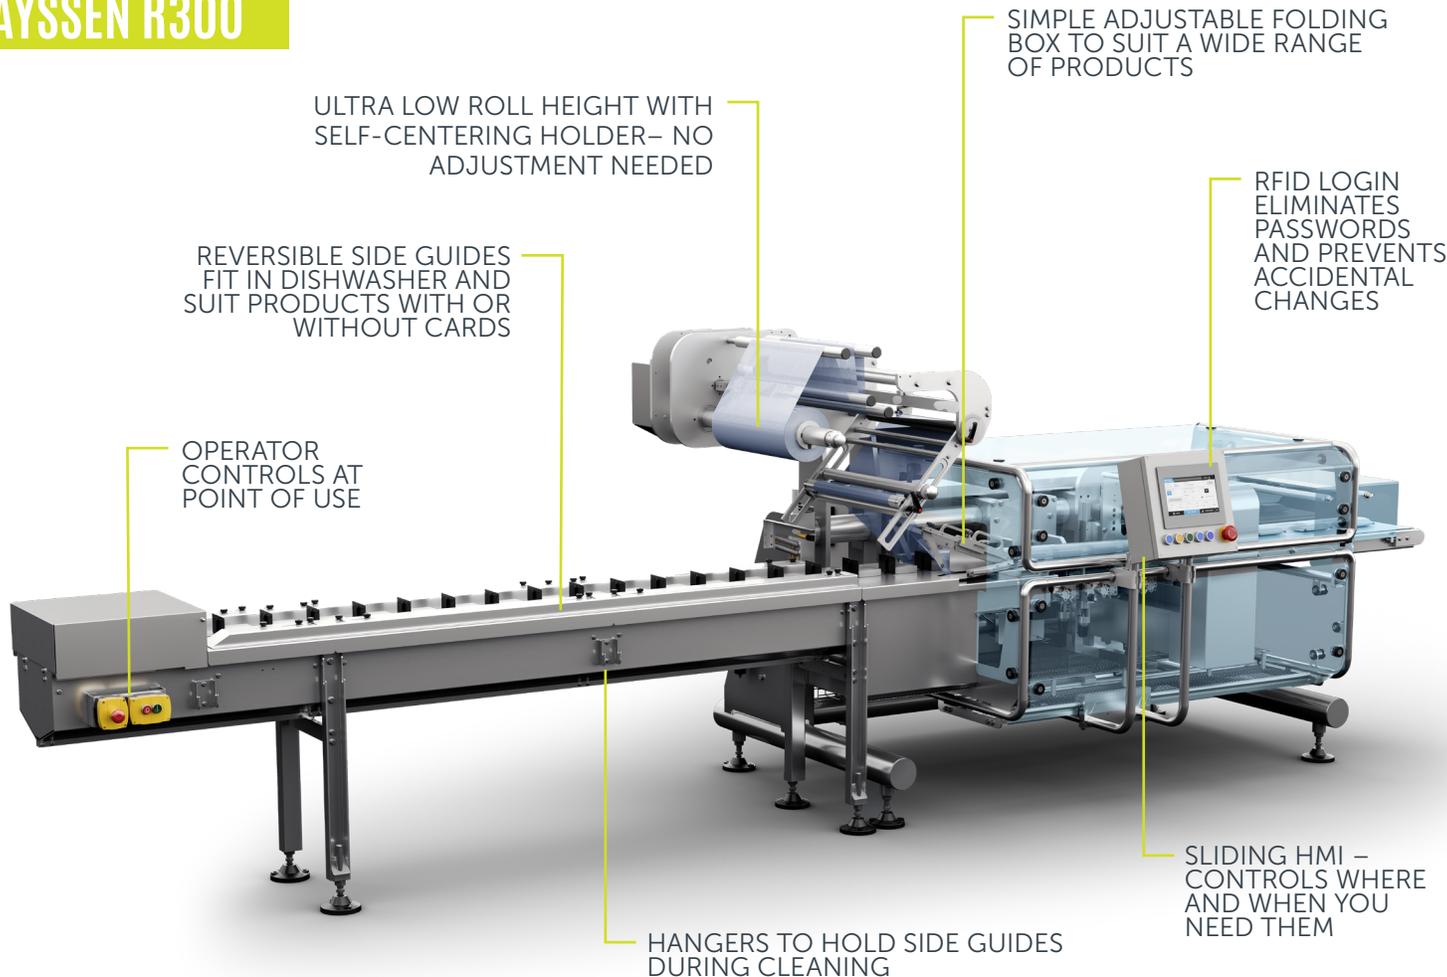

ULTRA LOW ROLL HEIGHT WITH SELF-CENTERING HOLDER- NO ADJUSTMENT NEEDED

REVERSIBLE SIDE GUIDES FIT IN DISHWASHER AND SUIT PRODUCTS WITH OR WITHOUT CARDS

OPERATOR CONTROLS AT POINT OF USE

SIMPLE ADJUSTABLE FOLDING BOX TO SUIT A WIDE RANGE OF PRODUCTS

RFID LOGIN ELIMINATES PASSWORDS AND PREVENTS ACCIDENTAL CHANGES

HANGERS TO HOLD SIDE GUIDES DURING CLEANING

SLIDING HMI – CONTROLS WHERE AND WHEN YOU NEED THEM

ADDITIONAL TECHNICAL INFORMATION

- 480v 3 phase
- 850mm +/-50mm bed height
- Max film reel width – 500mm
- Max film reel diameter – 350mm
- No Product No Bag standard
- Speed – up to 150ppm
- Product Length – 40 to 500mm
- Product Width – 25 to 235mm
- Product Height – 2 to 130mm



SCAN the QR code for more information