

Ultima Sanitary Frame



- New sanitary frame with no hollow tubes
- High speed, heavy-duty, servo driven end seal jaw assembly
- Independent stager cooler outperforms ultrasonic sealing technology
- More dwell time for better seals and increased packaging speeds
- New sloped machine drip pan to shed water and product
- Optional top mounted control cabinet

Ultima Sanitary Frame

The Sanitary Frame Ultima SV is suited for environments where sanitation is a must. The Ultima SV has a long-standing reputation as a solid, durable member of the BW Flexible Systems (previously Hayssen) family of VFFS machines.

The Ultima SVJ's servo driven system features off-the-shelf Allen-Bradley controls. Sealing systems for laminate and polyethylene packaging materials can be customized to meet your application requirements. Higher sanitation features available.

Production Rate

Up to 120 bags per minute

Package Range

Minimum Width: 2-1/8" (54mm)

Minimum Length: 3" (76mm)

Maximum Width: 8" to 18" (203 to 457mm) depending on frame size

Maximum Length: 8" to 28" (203 to 711mm) depending on frame size

Power Requirements


230/460 vac, single phase, 50/60 hz, 30 amp service

Air Requirements

2.5 scfm @ 65 psi

Let us customize an Ultima SVJ to meet your specific requirements, whether it is a specific bag style or a production need the Ultima SVJ is a proven performer.

A few of the many available options include stainless steel construction, integrated zipper applicator, various hole punches, tear notches, code daters, gas flushing, static eliminators and tucking devices. We have extensive experience in integrated systems through a wide variety of feed systems including scales, augers, volumetrics and pumps for a wide variety of applications.

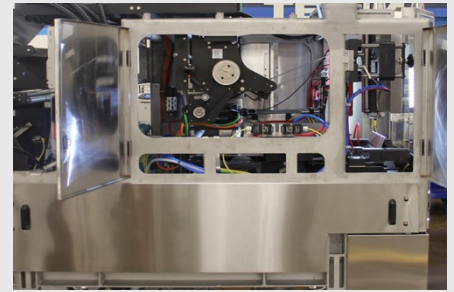


3/8" Thick Laser Cut 316 Stainless Steel Sanitary Frame



Open Channel Frame with no hollow tubing and no flat level surfaces



HMI Screen

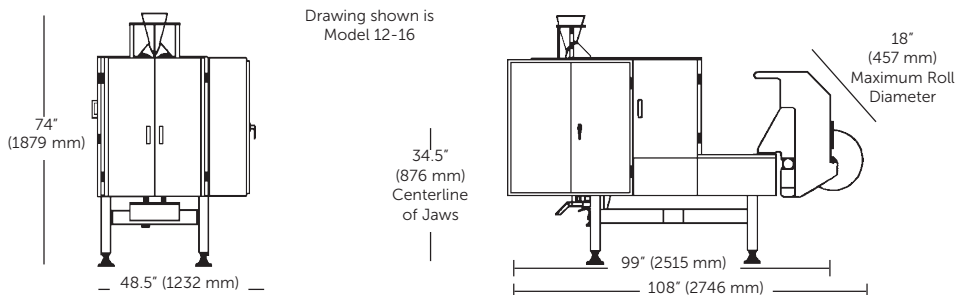

Hayssen | Hudson-Sharp | Rose Forgrove | Sandiacre | Schib | Simionato | Symach | Thiele